

**HORED** 丰润达®

**6-Port 100Mbps  
BT PoE Switch  
AI106BT**

**Product brochure**

Shenzhen Fengrun Technology Co., Ltd

## Brief Introduction: :


AI106BT, a 6-port 100Mbps AI PoE switch, the product has 4 working modes, AI VLAN mode, AI Extend mode, AI PoE mode, AI QoS mode; By default, all ports communicate freely.

**Enable AI VLAN mode**, 1-4 ports are isolated from each other, which can effectively suppress network storms and improve network performance;

**Enable AI Extend mode**, 1-4 ports effective transmission distance up to 250 meters, suitable for long-distance monitoring and power supply;

**Enable AI PoE mode**, the switch automatically detects the working condition of the PD device, and automatically restarts the device when it finds an abnormal device;

**Enable AI QoS mode**, video data is prioritized in case of device congestion, making video smoother. Ports 1-4 support IEEE 802.3 af/at/bt standard power supply, can automatically detect, identify and power PD devices that meet the standard, so there is no need to worry about damaging private standard PoE or non-PoE devices.

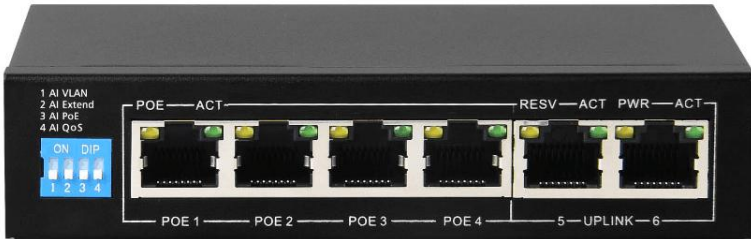

## Key features :

### Port 6KV lightning protection

- The full port supports 6KV lightning protection, supports power supply over-temperature protection, over-voltage protection, inrush current protection and other protection features.

### Swap features

- Non-blocking switching architecture, all ports support wire-speed forwarding.
- Provides two 10/100M RJ45 uplink ports at the same time.
- Supports IEEE 802.3x full-duplex and half-duplex backpressure flow.
- Supports uplink port auto-rollover (Auto MDI/MDIX).

### AI smart buttons

- AI Extend: 1-4 ports support 250 meters of long-distance power supply (it is recommended to use super five categories to connect the Internet line);
- AI VLAN: Isolate 1-4 ports from each other, which can effectively suppress network storms and improve network performance;
- AI QoS: Prioritize the processing of identified video data to make video transmission smoother;
- AI PoE: Automatically detects the powered port, finds the dead device, and restarts the device without power;

### PoE features

- Complies with IEEE802.3af/at/bt standards, with a maximum PoE power of 90W per port.
- Support PoE short circuit protection, overcurrent protection, over temperature protection, etc.
- Support AI PoE, restart dead devices.

### Ease of use

- Plug to use, no configuration required, easy to use.
- Zero configuration feature, the power supply is automatically supplied to the adaptive device.

## Product Specifications:

<b>Network interface</b>	<ul style="list-style-type: none"><li>● 4 x 10/100Mbps PoE-enabled RJ45 ports (ports 1 to 4)</li><li>● 2 x 10/100Mbps non-PoE function RJ45 ports (ports 5 ~ 6)</li></ul>
<b>Network protocol standards</b>	<ul style="list-style-type: none"><li>● IEEE 802.3i、 IEEE 802.3u、 IEEE 802.3x、 IEEE 802.3af、 IEEE 802.3at、 IEEE 802.3bt</li></ul>
<b>Performance specifications</b>	<ul style="list-style-type: none"><li>● Backplane bandwidth: 1.2Gbps (non-blocking)</li><li>● Packet forwarding rate: 0.89Mpps</li><li>● MAC address table: 2K</li><li>● Forwarding mode: Store-and-forward</li></ul>
<b>LED indicator</b>	<ul style="list-style-type: none"><li>● Power LED</li><li>● LINK/ACT indicator</li><li>● PoE indicator</li><li>● RESV: Reserved</li></ul>
<b>PoE bits</b>	<ul style="list-style-type: none"><li>● 1/2/4/5(+), 3/6/7/8(-)</li></ul>
<b>Power support</b>	<ul style="list-style-type: none"><li>● Single port maximum output power: 90W</li><li>● The maximum power supply of the whole machine: 96W</li></ul>
<b>Dimension</b>	<ul style="list-style-type: none"><li>● Size (length x width x height): 125mm*75mm*27mm</li></ul>
<b>Environmental specifications</b>	<ul style="list-style-type: none"><li>● Working temperature: 0 °C ~ 40 °C</li><li>● Storage temperature: -40 °C ~ 70 °C</li><li>● Working humidity: 10% ~ 90% RH does not condense</li><li>● Storage humidity: 5%~90% RH non-condensing</li></ul>
<b>Safety specifications</b>	<ul style="list-style-type: none"><li>● CE/ROHS/FCC/CCC</li></ul>

# Networking applications

